



Door-Max

Attractive, slender design compliments any store environment.

The Door-Max features Sensormatic AM EAS technology in an attractive, slender antenna to protect exits up to 1.8m (6ft) wide. Attached to door frames, glass and other surfaces, this detection system compliments any store decor whether in a shopping mall or a stylish boutique. The Door-Max is compatible with Sensormatic auxiliary receivers for a cost-effective alternative with comparable detection performance. The integrated audio and visual alarms notify store personnel if protected merchandise passes through the detection zone.

Through system configuration, "Tags-too-Close" is an offered feature developed to help store associates better manage merchandising of tagged goods at the front of the store. This feature helps reduce unnecessary and costly service calls and decreases nuisance alarms to enhance the shopper experience. Another system-configured feature is Jammer Detection. This software triggers a pedestal alarm as soon as an electronic signal from a Jammer device is detected; helping eliminate the threat of would-be thieves using this method.

Door-Max provides in-store EAS and Traffic Intelligence when connected to a compatible data management device to better manage store operations.

Retailer Values

- // Sleek, modern antenna compliments any store entrance
- // Built-in visual and audible indicators immediately notify store associates of alarm events
- // When connected to a compatible data management device, this system provides in-store EAS and Traffic Intelligence to better manage store operations
- // "Tags-too-Close" feature helps reduce unnecessary and costly service calls and helps manage merchandising of tagged products at the store front
- // Jammer Detection helps reduce shrink by notifying staff of attempts to disable the EAS system using a separate audible alarm

Product Compatibility

- Sensormatic AM Sensors
- Ranger Receivers
- Satellite Receivers
- Amorphous Core Receiver
- Stereo Overhead Traffic Sensor
- Mono Overhead Traffic Sensor
- Local Device Manager II (LDM II)
- UltraLink
- Digital Remote Alarm

Specifications

- Height** 183.9cm (72.4in)
- Width** 24cm (9.4in)
- Thickness/Depth** 4.4cm (1.7in)
- Weight** 11.6kg (25.5lbs)

Electrical

Receiver

- Center Frequency 58kHz
- Receive Coil Resistance 1.6 ohms (±5%)

Alarm

- Audio Level 109dBA

Environmental Constraints

Ambient Temperature

0°C to 50°C (32°F to 122°F)

Relative Humidity

0 to 90%, non-condensing

Enclosure

- IPx0
- Evaluated for altitudes less than 3200m (10,500ft)

Declarations

EMC

47 CFR, Part 15
 EN 300 330
 EN 301 489
 RSS 210

Safety


EN 60950-1

CE This product is in conformity with RoHS II Directive 2011/65/EU and REACH Substances of Very High Concern as defined in Regulation (EC) No 1907/2006 and subsequent amendments to both.

Configurations for the AMS9060 (NA and EU) and AMS9040 (ROW).

Measurements - meters (feet)


Single

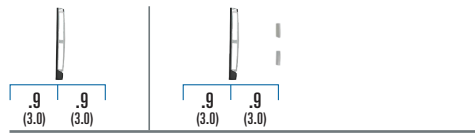


Dual



Split

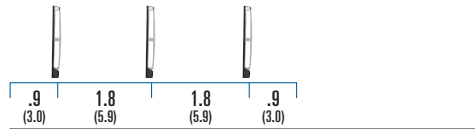

Quad

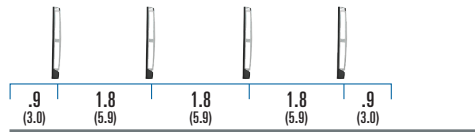

Product Codes	Digital Antenna	Single Antenna(s)	Dual Antenna(s)	Split Antenna(s)	Quad Antenna(s)	AMB9040 Controller	AMB9060 Controller	NA and EU	Rest of World (ROW)
ZSDM4	●								●
ZADM4-1		●				●			●
ZADM4-2			●			●			●
ZADM4-3				●		●			●
ZADM4-4					●	●			●
ZSDM4A	●							●	
ZADM4A-1		●					●	●	
ZADM4A-2			●				●	●	
ZADM4A-3				●			●	●	
ZADM4A-4					●		●	●	